
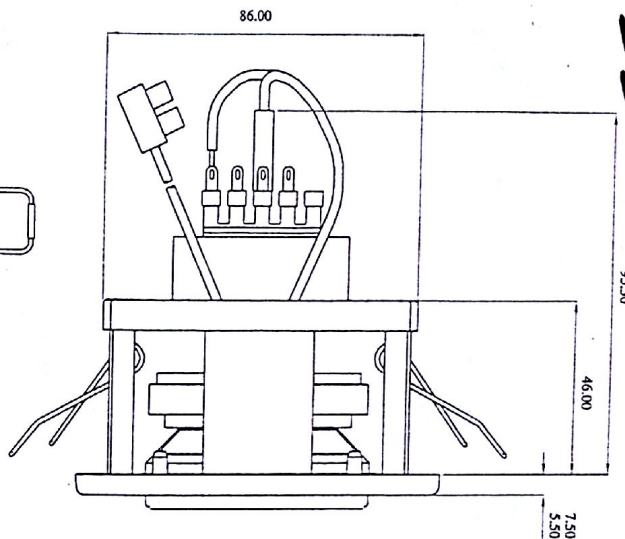


952.176
178
180
182

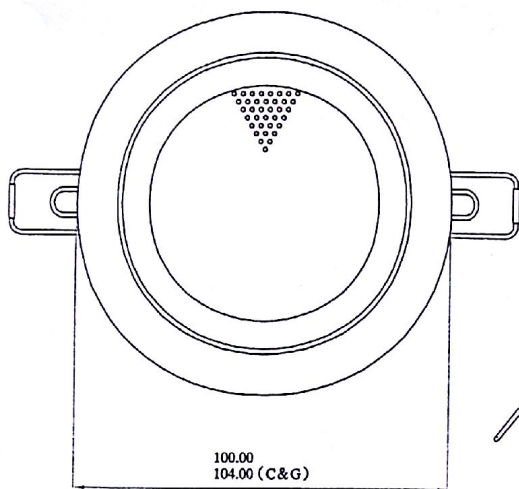

- Material : ABS with metal grille
- Color : Standard color is WHITE color.

With BLACK color,suffix model number with "B" – Example :

With CHROME color,suffix model number with "C" – Example :


With GOLD color,suffix model number with "G" – Example :

Special colors are available in quantities of 1000 pcs or more per shipment.


- Dimensions : 100 ϕ X 95.5 D mm.
- Cutting hole : 92 ϕ mm.

Model No.	[REDACTED]		
Power Handling	6W		
Rated Input	8 Ω	100V	70.7V
Transformer Power Tappings	n.a.	1667 Ω /6W-3333 Ω /3W -6667 Ω /1.5W	833 Ω /6W-1667 Ω /3W -3333 Ω /1.5W
SPL (1W/1M)@1k Hz	85dB		
Max.SPL (6W/1M)	92dB		
Freq. Range(-10dB)	120 ~ 20k Hz		


INSTALLATION GUIDE

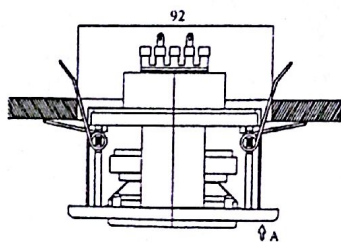

Step 1. Draw a 92 mm circle on the ceiling, then place the springs on two sides of speaker into the hole.

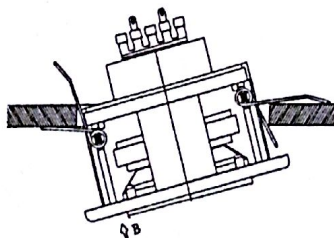

Step 2. Push up at "A" to fix the part of speaker on the ceiling

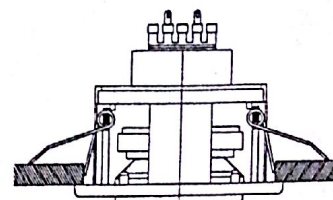

Step 3. Push up at "B" to complete the installation.